


Nitto tape 12FB

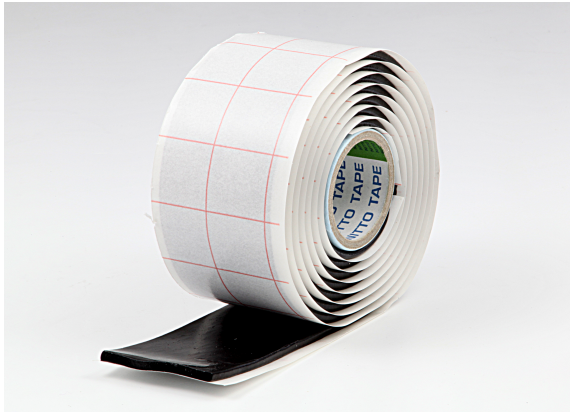

Nitto 12FB is a self amalgamating putty tape. By stretching and wrapping around pipefittings, cables, or other objects, the putty will instantly amalgamate into its self, thus creating a waterproof barrier to prevent corrosion. 12 FB is suitable for in and outdoors.

Features

- Moldable and self-amalgamating putty tape
- Soft and tacky putty
- Waterproof and corrosion protection
- Thickness 3,0mm
- Elastic and very good elongation properties. Elongation at break >3000%

Specifications

Material	Synthetic rubber	
Thickness	3,0mm	ASTM D 1000
Weight	3.640 gr/m ²	
Yield strength	250 g/6mm	ASTM D 638
	13 g/mm ²	
Elongation at break	> 3000%	ASTM D 1000
Needle penetration	5,5mm	ASTM D 5
Breakdown voltage	17 kV/mm	ASTM D 1373
Volume resistivity	1 x 10 ¹⁰ ohm cm	ASTM D 257
colour	black	

More info

<http://www.filoform.nl/en/nitto-tape>

Products

Art.nr.	Product Name	Dimensions	Colour	Order unit
81070	Putty tape type 12FB, 38mm x 1,5m	38mm x 1,5m x 3,0mm	black	10 rollen / carton