

MD+ Sealant




MD + is an elastic one-component sealant suitable for the gas and watertight sealing of cable entries.

With the application of the MD+ sealant, you will protect valuables from damage which is caused by gas and water leaks.

Gas and watertight according to NEN 2768

Features

- Flexible, one component, adhesive and sealing compound in a cartridge - (310ml)
- High levels of Gas and Water tightness
- Removable / Re-enterable
- Excellent adhesion, applicable to all common building materials
- Shows Fire resistance properties
- Resistant against Water, Alkaline, Chemical agents
- Resistant to Hydrogen Sulphide / Methane and many other Gases (NedLab)
- Non corrosive
- Solvent free
- Shock absorbing
- Non toxic, neutral and almost odourless
- Suitable for any shaped duct / bore hole / opening
- Quick and easy installation
- Seals all know materials, PVC & PE sheathed cables, PILC, (HD) PE pipes
- Suitable for renovations, can be installed retrospectively

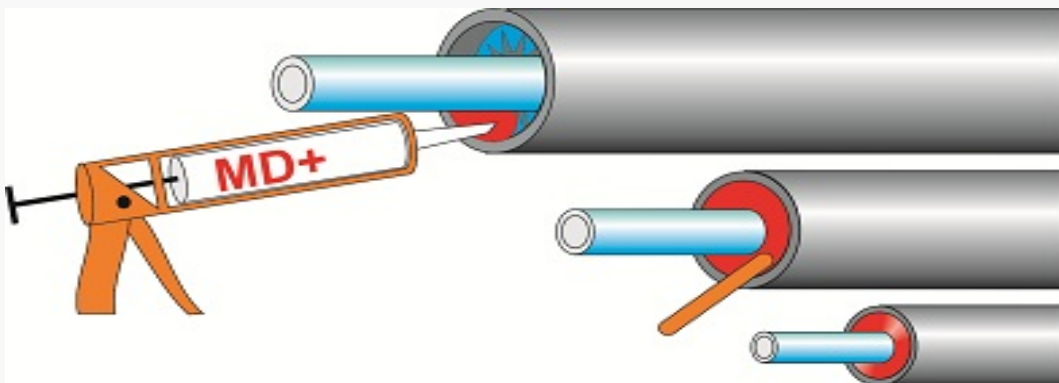

Specifications

Density	1,2 gr/cm ³	
Flow	< 2mm	ISO 7390
Colour	red-brown	
Skin over time	± 15 minutes	23°C/55%RH
Curing	3 mm/24h	
Hardness	30 shore A	DIN 53505
Elongation	100%	DIN 53504
Tensile strength	0,8 N/mm ²	DIN 53504
Operating temperature	+5°C to +40°C	
Temperature resistance	-40°C to +120°C	

More info

Toepassing:

- Ondergrond moet schoon, droog, stof- en vetvrij zijn
- Kabels opruwen voor het vergroten van de hechting
- Een laag van c.a. 20mm aanbrengen in de doorvoeropening
- Indien gewenst afwerken met een vochtige doek
- Tijdens uitharding kabel niet belasten

Products

Art.nr.	Product Name	Order unit
80849	MD+ Sealant 310ml	12 pcs/carton