


# Thin wall heat shrink tube 2:1

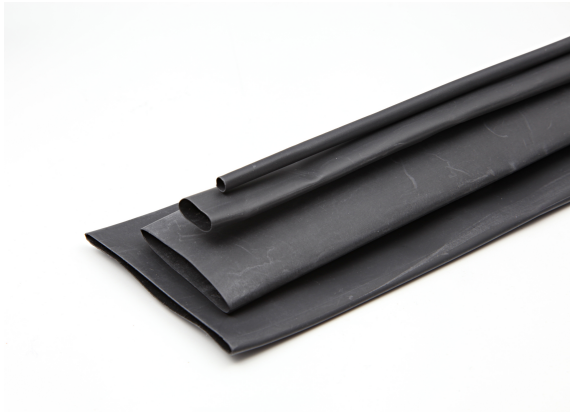

Electrical isolation Cable protection Bundling Identification

## Features

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +125°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flame retardant
- Flexible
- Cadmium free
- Halogen free
- Other colours on request: red, blue, yellow, green, white

# Thin wall heat shrink tube 2:1

## Specifications

Material	Polyolefine	
Shrink temperature	70°C till 100°C	
Continuous temperature range	-55°C till +125°C	
Dielectric strength	≥ 20 kV/mm	IEC 243
Volume resistivity	> 1 x 10 <sup>14</sup> ohm cm	IEC 93
Tensile strength	≥ 14 Mpa	ASTM D 638-98
Elongation at break	≥ 400%	ASTM D 638-98
Longitudinal change	≤ 5%	UL 224

## Thin wall heat shrink tube 2:1

# Thin wall heat shrink tube 2:1

## Products

Art.nr.	Product Name	Diameter before shrink (mm)	Diameter after shrinkage (mm)	Wall thickness after shrink (mm)	Colour	Order unit
8.108100	Shrink tube TW black 1,5/0,5	1,5	0,5	0,45	black	60 m (50x1,2m)
8.108104	Shrink tube TW black 1,6/0,8	1,6	0,8	0,36	black	60 m (50x1,2m)
8.108105	Shrink tube TW black 2,4/1,2	2,4	1,2	0,40	black	roll 200 m
8.108106	Shrink tube TW black 3,2/1,6	3,2	1,6	0,44	black	roll 200 m
8.108107	Shrink tube TW black 4,8/2,4	4,8	2,4	0,51	black	roll 200 m
8.108108	Shrink tube TW black 6,4/3,2	6,4	3,2	0,55	black	roll 150 m
8.108109	Shrink tube TW black 9,5/4,8	9,5	4,8	0,55	black	roll 100 m
8.105400.1	Krimpkous dunwandig zwart 12/4,0	12	4,0	0,75	black	roll 100m
8.108110	Shrink tube TW black 12,7/6,4	12,7	6,4	0,65	black	roll 100 m
8.108111	Shrink tube TW black 19,1/9,5	19,1	9,5	0,80	black	roll 50 m
8.108112	Shrink tube TW black 25,4/12,7	25,4	12,7	0,90	black	roll 50 m

## Thin wall heat shrink tube 2:1

8.108113	Shrink tube TW black 38,1/19	38,1	19	1,00	black	roll 25 m
8.108118	Shrink tube TW black 76/38	76	38	1,27	black	roll 25 m