


Heavy wall shrink tube with adhesive

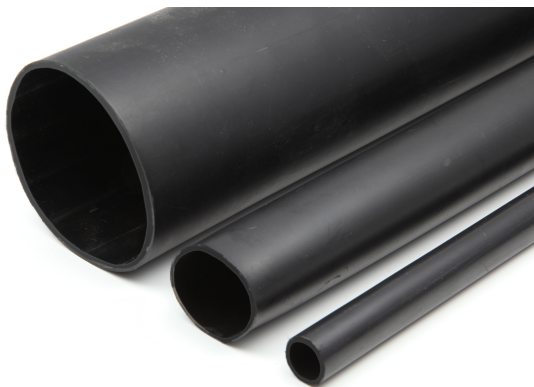

Cable joints and cable terminations
Cables till 1kV
Telecommunication
Indoor / Outdoor underground, above ground, under water, in cable ducts

Features

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +90°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flexible
- Cadmium free and halogen free
- Colour: black

Heavy wall shrink tube with adhesive

Specifications

Material	Polyofine	
Shrink temperature	> 125°C	
Continuous temperature	-55°C till +90°C	
Dielectric strength	≥ 15 kV/mm	ASTM D 2671-98
Volume resistivity	> 1 x 10 ¹² ohm cm	ASTM D 257-98
Heatshock (30 min/200°C)	No damage	ASTM D 2671-98
Tensile strength	≥ 12 Mpa	ASTM D 2671-98
Elongation at break	≥ 400%	ASTM D 2671-98
Longitudinal change	≤ 15%	ASTM D 2671-98
Waterabsorbtion	≤ 0,5%	ASTM D 570

Heavy wall shrink tube with adhesive

Heavy wall shrink tube with adhesive

Products

Art.nr.	Product Name	Diameter before shrink (mm)	Diameter after shrinkage (mm)	Wall thickness after shrink (mm)	Colour	Order unit
8420005	Heat shr. tube HWA/SK5 12-3/1000	12	3	2,5	light blue	10 x 1000mm
8420015	Heat shr. tube HWA/SK5 20-6/1000	20	6	2,7	light blue	10 x 1000mm
8420035	Heat shr. tube HWA/SK5 30-8/1000	30	8	4,0	light blue	10 x 1000mm
8420050	Heat shr. tube HWA/SK5 40-13/1000	40	13	4,0	light blue	10 x 1000mm
8420060	Heat shr. tube HWA/SK5 55-18/1000	55	18	4,1	light blue	10 x 1000mm
8420070	Heat shr. tube HWA/SK5 69-20/1000	69	20	4,1	light blue	10 x 1000mm
8420075	Heat shr. tube HWA/SK5 95-30/1000	95	30	4,1	light blue	10 x 1000mm
8414100	Heat shr. tube HWA/SK5 125-40/1200	125	40	4,0	light blue	5 x 1200mm
8414105	Heat shr. tube HWA 130-36/1200	130	36	4,0	light blue	5 x 1200mm

Heavy wall shrink tube with adhesive

8414110	Heat shr. tube HWA/SK5 160-50/120 0	160	50	4,0	light blue	5 x 1200mm
---------	---	-----	----	-----	------------	------------