

# Straight connection joint



Low voltage 0,6/1 (1,2) kV, Telecommunication and  
Signalisation  
Inside / outside underground, above ground, underwater, in  
cable ducts


## Features

- Cable joint type tested according to: EN 50393:2006-11
- Resin type tested according to: IEC60455-3-8:2013
- Hydrolysis resistant polyurethane resin in transparant 2-component bag
- Strong transparant snaplock shells
- Fully waterproof, no leakage of liquid resin
- Distance spacers included (version 4x10mm<sup>2</sup> - 4x25mm<sup>2</sup>)
- Complete kit, sealing tape, sandpaper, and protective gloves inclusive
- Installation instruction with clear drawings
- Easy and quick installation
- Connectors and/or earthing kits available on request
- Other shell size dimensions available on request

## More info

[Download: Mixing instructions](#)

## Straight connection joint

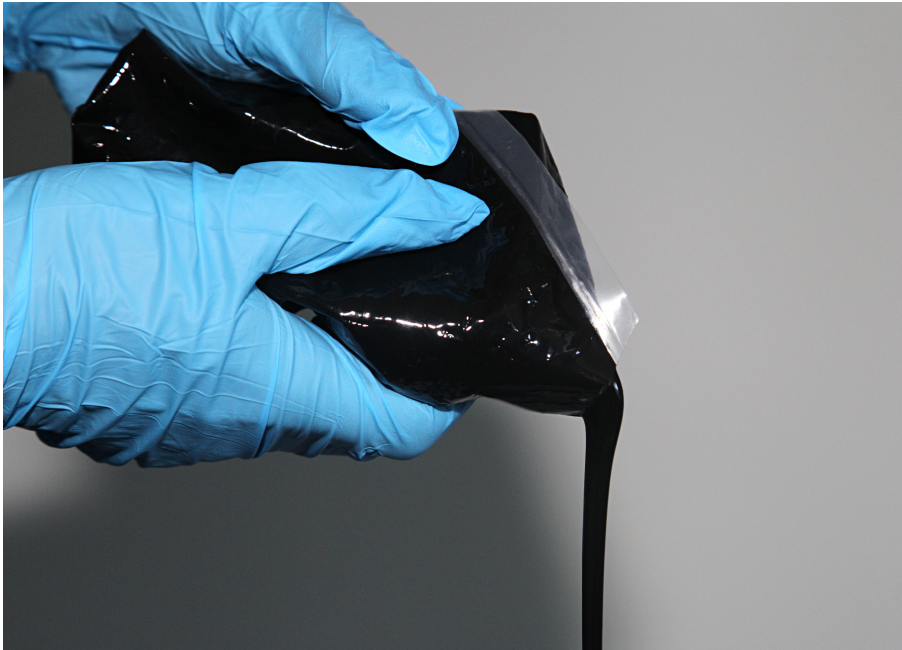

# Straight connection joint

## Products

Art.nr.	Product Name	Cable diameter (mm)	Dimensions (mm)	Order unit
80163	Straight connection joint till 4x6mm <sup>2</sup>	Ø 06 - 28	L189 x Ø40	per piece
80164	Straight connection joint till 4x16mm <sup>2</sup>	Ø 12 - 32	L250 x Ø45	per piece
80164B	Straight connection joint till 4x25mm <sup>2</sup>	Ø 10 - 34	L320 x Ø60	per piece
80165	Straight connection joint till 4x50mm <sup>2</sup>	Ø 26 - 53	L355 x Ø72	per piece
8.000907	Straight connection joint till 4x95mm <sup>2</sup>	Ø 30 - 48	L450 x Ø75	per piece
8.000908	Straight connection joint till 4x150mm <sup>2</sup>	Ø 32 - 68	530 x 132	per piece
8.000909	Straight connection joint till 4x240mm <sup>2</sup>	Ø 45 - 70	L700 x Ø155	per piece