


# Connection- and Branch-off joint



Low voltage 0,6/1 (1,2) kV, Telecommunication and Signalisation  
Inside / outside underground, above ground, underwater, in cable ducts

## Features


- Cable joint type tested according to: EN 50393:2006-11
- Resin type tested according to: IEC60455-3-8:2013
- Also applicable as double branch-off joint
- Hydrolysis resistant polyurethane resin in transparent 2-component bag
- Transparent 2-piece, cylindrical shells with pre-installed sealing strips
- Excellent resistance against UV, chemicals and alkalines
- Fully waterproof
- Installation instructions and protective gloves inclusive
- Very easy and quick installation
- Connectors and/or earthing kits available on request
- Other shell size dimensions available on request

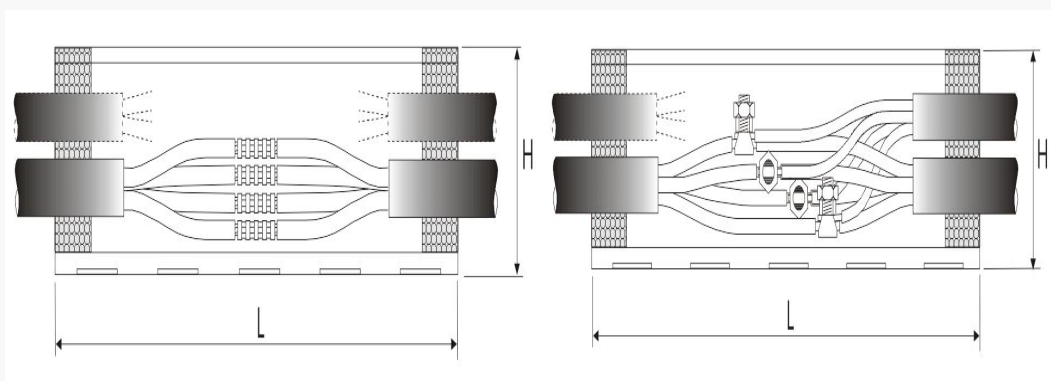

## More info

[Download: Mixing instructions](#)

# Connection- and Branch-off joint

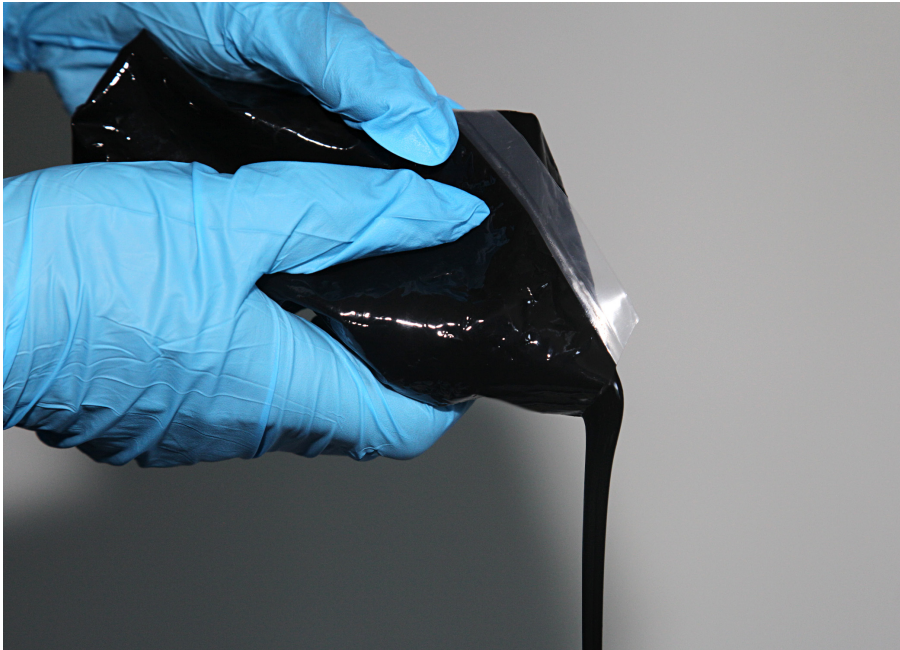

## Products

Art.nr.	Product Name	Order unit
8.003060	AVM 40/175 - 4x6mm <sup>2</sup> / 4x4mm <sup>2</sup>	per piece
8.003061	AVM 58/220 - 4x10mm <sup>2</sup> / 4x10mm <sup>2</sup>	per piece
8.003062	AVM 75/300 - 4x25mm <sup>2</sup> / 4x16mm <sup>2</sup>	per piece
8.003063	AVM 95/400 - 4x70mm <sup>2</sup> / 4x35mm <sup>2</sup>	per piece
8.003064	AVM 110/500 - 4x150mm <sup>2</sup> / 4x50mm <sup>2</sup>	per piece
8.003065	AVM 125/600 - 4x150mm <sup>2</sup> / 4x70mm <sup>2</sup>	per piece
8.003066	AVM 145/500 - 4x185mm <sup>2</sup> / 4x150mm <sup>2</sup>	per piece