

# Insulated connector



Suitable for making a safe connection of live cables without stripping the insulation from the conductor. The connector is completely safe to touch during the installation.

The connector can be installed without stripping the conductors  
Man independent assembly thanks to the plastic shear bolt.  
The insulated connector is safe in use.

## Features

- The connector can be installed without stripping the conductors
- Man independent assembly thanks to the plastic shear bolt.
- The insulated connector is safe in use.


## Specifications

Connectors for LV underground connection:

- Fittings for aluminium or copper cables, round or sectoral, stranded class 2 or solid class 1.
- Tightening fuse screws with a standard manual socket or an impact wrench.
- The breakage of the fuse heads always remains in the volume of the coupling (without ever exceeding 2 mm), and avoids the risk of damaging the insulation.

Description:

- Tinned aluminum alloy body and aluminum alloy screws.
- Shear head screw for F versions. For other versions, hexagon socket head screws.
- The UB versions are without a central blocking part and with a viewing hole.
- Small size, particularly suitable for heat-shrink and cold-shrink joints.

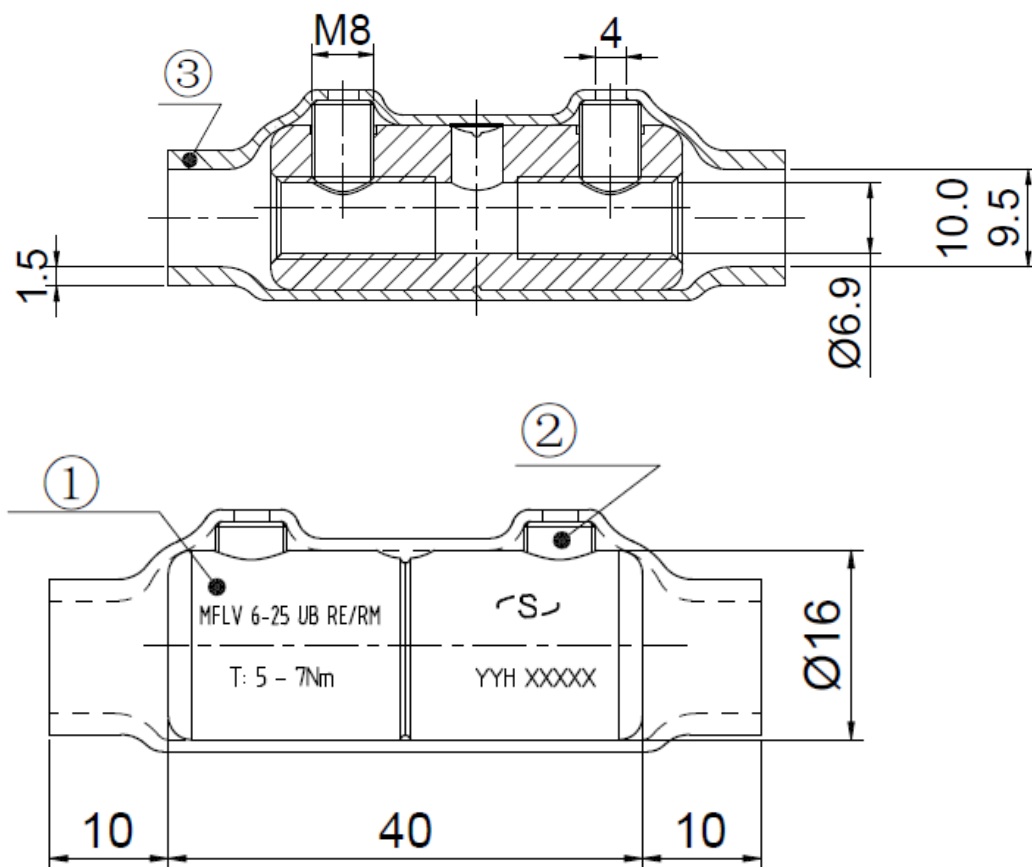

## Products

Art.nr.	Product Name	Core min. (mm)	Core max. (mm <sup>2</sup> )	Order unit
MFLV6-25UBM8	Insulated connector 6-25mm <sup>2</sup>	6	25	50 pcs/carton