

# Y Branch-off joint




Low voltage 0,6/1 (1,2) kV, Telecommunication and  
Signalisation  
Inside / outside underground, above ground,  
underwater, in cable ducts

## Features

- Cable joint type tested according to: EN 50393:2006-11
- Resin type tested according to: IEC60455-3-8:2013
- Hydrolysis resistant polyurethane resin in transparent 2-component bag
- Strong transparent plastic shells
- Excellent resistance against UV, chemicals and alkalines
- Fully waterproof
- Installation instructions and protective gloves inclusive
- Very easy and quick installation
- Connectors and/or earthing kits available on request
- Other shell size dimensions available on request

## Specifications

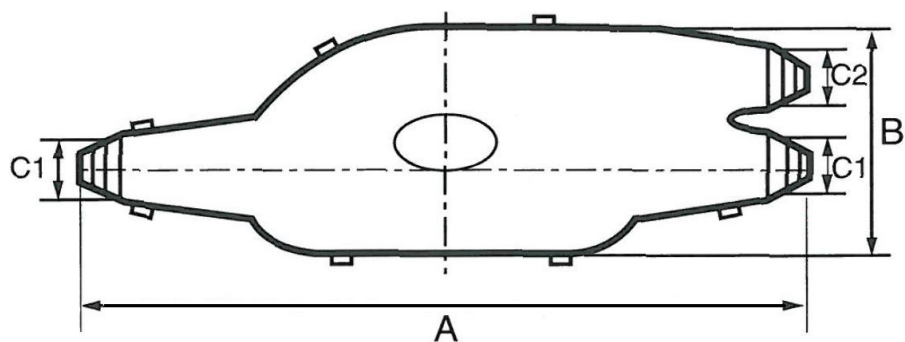

A = 190mm  
B = 60mm

C1 =  
min. 10mm  
max. 20mm

C2 =  
min. 10mm  
max. 20mm

# Y Branch-off joint

## More info

[Download: Mixing instructions](#)



## Products

Art.nr.	Product Name	Cable diameter (mm)	Dimensions (mm)	Order unit
80169	Y Branch-off joint 4 x 2,5mm <sup>2</sup>	Ø 10 - 20	190 x 60 x 47	per piece
801692	Y Branch-off joint 4 x 6mm <sup>2</sup>	Ø 12 - 24	220 x 76 x 77	per piece
801694	Y Branch-off joint 4 x 16mm <sup>2</sup>	Ø 09 - 25	335 x 120 x 89	per piece
801696	Y Branch-off joint 4 x 35mm <sup>2</sup>	Ø 08 - 30	420 x 135 x 112	per piece